




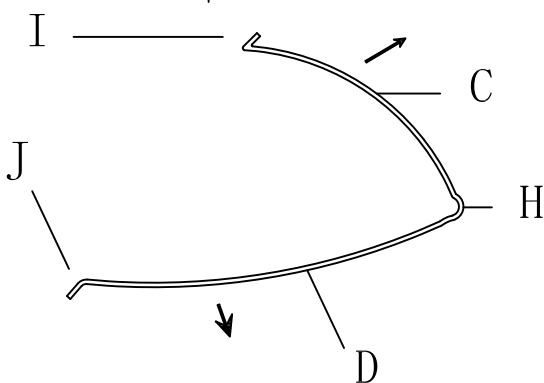

Assembly Instruction For
Replace Glass
86006 FTSST

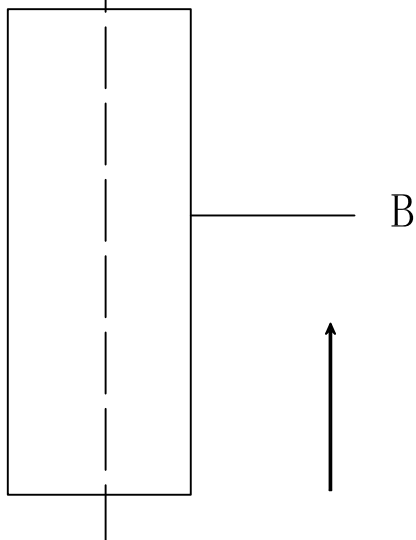

1. Screw bulb into the socket-2*13W .
2. Place glass(B) into lamp frame (A) carefully.
3. Put the two ends (I,J)of the clip into the side holes.
4. In accordance with the direction of the arrow, Press the both sides(C,D) of the clip with thumb so that fix vertex (H)of the clip into the middle notch(G)of the bottom bracket(K)to secure the glass (B), and then release the thumb.
5. For more details, please see the assembly steps from back.

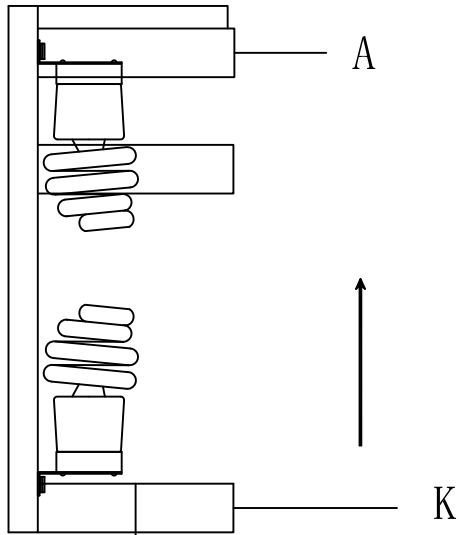