


# ALUMILUX™ I WALL SCONCE

## E41344 | E41346 | E41348

- ETL/cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Title 24 for outdoor use
- Dimmable with ELV Dimmer

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_

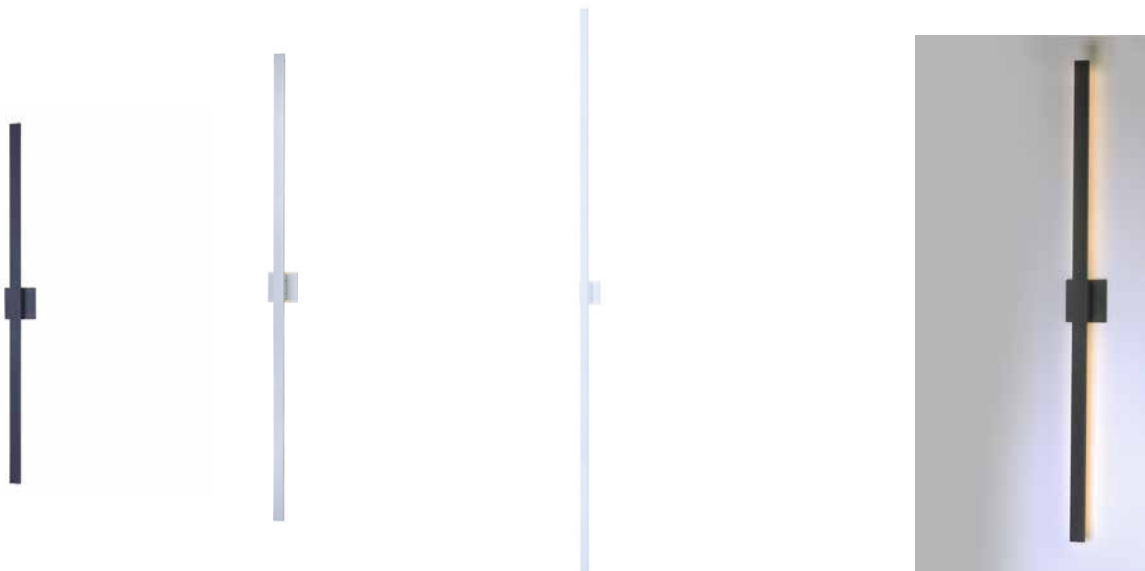

### PRODUCT DESCRIPTION


Bring the outdoors inside with our line of Architectural high quality interior and exterior wall sconces. European in design and machined out of blocks of solid Aluminum, these sconces have both the look and quality expected for the discriminate buyer. High powered LEDs create dramatic light effects and most are approved for wet location applications.

### MEASUREMENT

MODEL	DIMENSION	HCO	HANGING		
			WEIGHT	BP WIDTH	BP HEIGHT
E41344	4.5"W x 51"H x 2.25"EXT	25.5"	6.38 LB	4.5"	0.25"
E41346	4.5"W x 73"H x 2.25"EXT	36.5"	8.36 LB	4.5"	0.25"
E41348	4.5"W x 96"H x 2.25"EXT	48.0"	12.32 LB	4.5"	0.25"


### LAMPING

MODEL	BULB TYPE	CRI	LUMENS	COL TEMP.	DIMMABLE	INPUT
E41344	(2) 15W PCB LED (Integrated)	90+	2100	3000K	ELV	120V
E41346	(2) 25W PCB LED (Integrated)	90+	3500	3000K	ELV	120V
E41348	(2) 30W PCB LED (Integrated)	90+	4200	3000K	ELV	120V

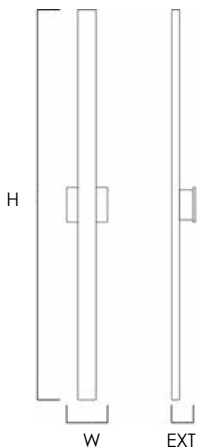

### FINISHES OPTIONS:

- Bronze (BZ)
- White (WT)
- Satin Aluminum (SA)



### MATERIAL:

Aluminum

### AVAILABLE SIZES:

51" | 73" | 96"

### RATINGS:

- ETL cETL IP65
- Wet Location
- ADA
- Title 24 (For Outdoor Use)



### ADDITIONAL:

- RATED LIFE: 40,000 Hours
- OPERATING TEMP: -20° C (-4°), 40° C (104° F)
- PHOTOMETRIC: Report Found Online
- INSTALL UP/DOWN: All
- LIGHTING DIRECT: Indirect

Always consult a qualified electrician before installing any lighting product