


# ALUMILUX | WALL SCONCE

## E41380 | E41381 | E41382

- ETL/cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Title 24 for outdoor use

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_

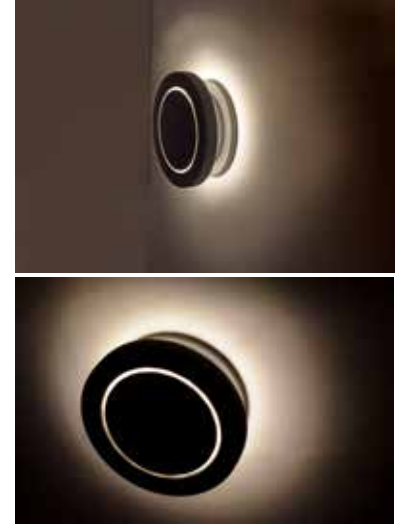

### PRODUCT DESCRIPTION

Bring the outdoors inside with our line of Architectural high quality interior and exterior wall sconces. European in design and machined out of blocks of solid Aluminum, these sconces have both the look and quality expected for the discriminate buyer. High powered LEDs create dramatic light effects and most are approved for wet location applications.

### MEASUREMENT

MODEL	DIMENSION
E41380	5.25"D x 5.25"D x 1.75"EXT
E41381	7"D x 7"D x 1.75"EXT
E41382	11.75"D x 11.75"D x 2.75"EXT

HCO	HANGING WEIGHT
2.75"	1.32 LB
3.50"	2.20 LB
6.00"	5.06 LB

### LAMPING

MODEL	BULB TYPE	CRI	LUMENS	COL	DIMMABLE	INPUT
			INIT. DEL	TEMP.		
E41380	(1) 6W PCB LED (Integrated)	80+	600 295	3000K	No	120V
E41381	(1) 8W PCB LED (Integrated)	80+	800 505	3000K	No	120V
E41382	(1) 15W PCB LED (Integrated)	80+	1500 1250	3000K	No	120V

### FINISHES OPTIONS:

- Bronze (BZ)
- White (WT)



**MATERIAL:**  
Aluminum

### AVAILABLE SIZES:

5.25" | 7" | 11.75"


### RATINGS:

- ETL cETL IP65
- Wet Location
- ADA
- Title 24 (For Outdoor Use)



### ADDITIONAL:

- RATED LIFE: 50,000 Hours
- OPERATING TEMP: -20° C (-4°), 40° C (104° F)
- PHOTOMETRIC: Report Found Online
- LIGHTING DIRECTION: Indirect

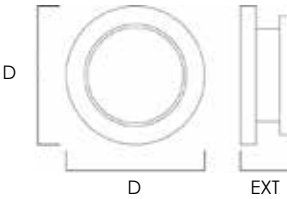

Always consult a qualified electrician before installing any lighting product