


# ALUMILUX™ I WALL SCONCE

**E41540 | E41542 | E41544**


- ETL/cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Title 24 for outdoor use
- Dimmable with ELV Dimmer
- Available as: 1-Light, 2-Light, and 3-Light

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_

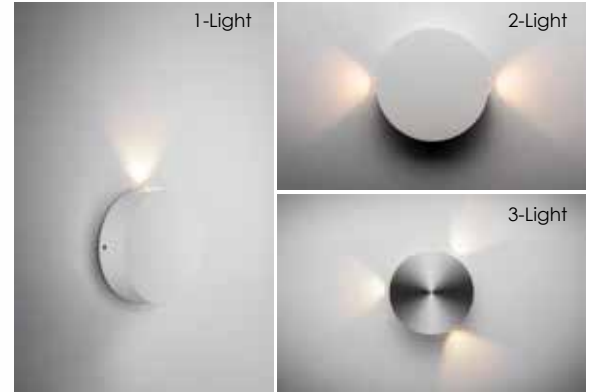

## PRODUCT DESCRIPTION

Bring the outdoors inside with our line of Architectural high quality interior and exterior wall sconces. European in design and machined out of blocks of solid Aluminum, these sconces have both the look and quality expected for the discriminate buyer. High powered LEDs create dramatic light effects and most are approved for wet location applications.

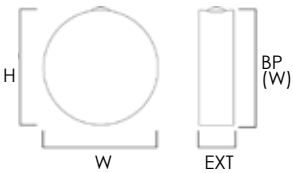

### MEASUREMENT

DIMENSIONS : 4.75"W x 5"H x 1.5"EXT  
 HANGING WEIGHT : 1.54 Lb  
 HCO : 2.5"  
 BP : 3.5"W x 0.4"H

### LAMPING

| MODEL  | BULB TYPE                   | CRI | LUMENS | COL TEMP. | DIMMABLE | INPUT |
|--------|-----------------------------|-----|--------|-----------|----------|-------|
| E41540 | (1) 4W PCB LED (Integrated) | 90+ | 280    | 3000K     | ELV      | 120V  |
| E41542 | (2) 4W PCB LED (Integrated) | 90+ | 560    | 3000K     | ELV      | 120V  |
| E41544 | (3) 4W PCB LED (Integrated) | 90+ | 840    | 3000K     | ELV      | 120V  |

## FINISHES OPTIONS:

Satin Aluminum (SA)  
 White (WT)



## MATERIAL:

Aluminum

## AVAILABLE MODELS:

E41540 | E41542 | E41544

## RATINGS:

ETL cETL IP65  
 Wet Location  
 ADA



## ADDITIONAL:

RATED LIFE: 50,000 Hours  
 OPERATING TEMP: -20° C (-4°), 40°C (104°F)  
 PHOTOMETRIC: Report Found Online

*Always consult a qualified electrician before installing any lighting product*