




PRODUCT NAME: Mod Mini Pendant
ITEM NUMBER: 30260

Please consult your electrician for hanging fixture and wiring.



The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Levitton IPL06-10Z
Levitton 6674-POW

Due to Inrush current, wattage should not exceed 150 Watts of product for a 600W dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

8W LED 3000K DIMMABLE

Locate all hardware & components before discarding packaging

Cleaning & Care:

Clean with soft cloth and a mild detergent.

DO not use abrasive cleaner.

PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.


MADE IN CHINA
Page 1 of (2)



PRODUCT NAME: Mod Mini Pendant
ITEM NUMBER: 30260

CAUTION: Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock.

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

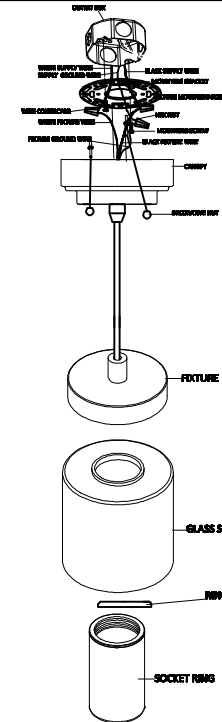

1. Remove MOUNTING BRACKET from fixture and install to OUTLET BOX.
2. Adjust wire length to desired mounting height, and tighten strain relief screws to secure.
3. Wires must be connected to driver found inside canopy. Wire driver input wires to supply wires in outlet box. Green wire is for Ground.
4. Install fixture to BRACKET and using DECORATIVE NUTS provided. Slide GLASS over socket and secure using RING spacer and frosted glass diffuser's SOCKET RING.

PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.