


Installation Instructions

Model 39847CLPN

1. Turn breaker off for circuit on outlet where fixture is to be installed.
2. Remove mounting bracket from fixture and install to electrical box
3. Install desired fixtures pole to obtain desired mounting height.
4. Insert Ring 4 and Canopy 5 onto poles and let drop to top of fixture.
5. Install fixture to mounting bracket and insert pin 10 and tighten
6. Wire fixture to wires in outlet box. Green wire is for Ground.
7. Move Ring 4 and Canopy 5 up poles tight to the ceiling and secure by tightening screw 13
8. Install maximum 40 watt G9 xenon lamps

WARNING!

Xenon lamps burn hot. Allow 15 minutes after turning off before touching!

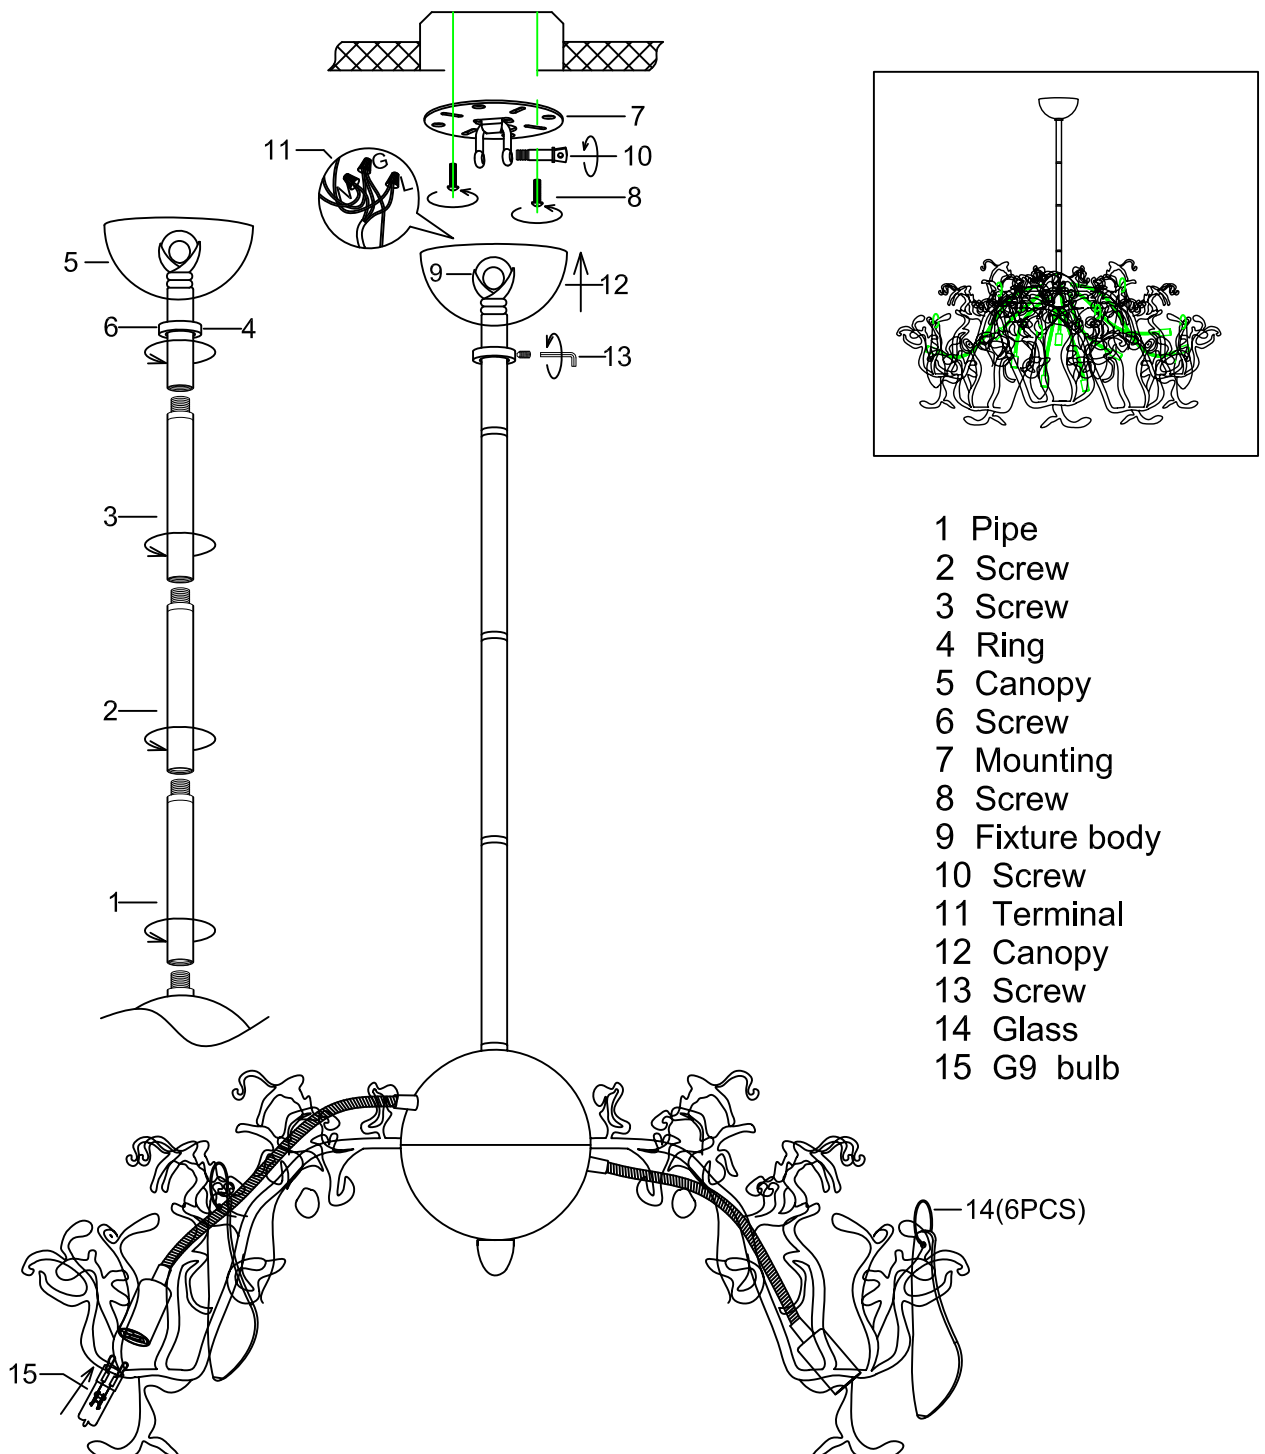

- 1 Pipe
- 2 Screw
- 3 Screw
- 4 Ring
- 5 Canopy
- 6 Screw
- 7 Mounting
- 8 Screw
- 9 Fixture body
- 10 Screw
- 11 Terminal
- 12 Canopy
- 13 Screw
- 14 Glass
- 15 G9 bulb