

# WAFER LED LINEAR PENDANTS I SURFACE MOUNT


## 57842/ 57846

- New models feature 120-277V input
- Ultra thin 0.5" H
- Dimmable with Triac Dimmer, CRI 90+
- 50,000 Hours Rated life, 3000K
- Suitable for Damp location
- ETL/cETL IP65

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_



57842

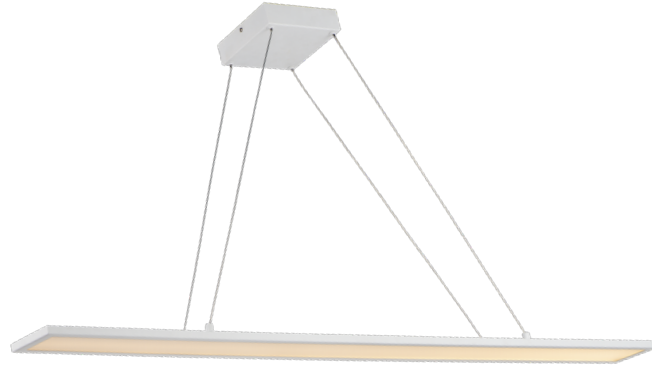

57846

### PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

### MEASUREMENTS


MODEL	DIMENSIONS	CANOPY	OAH	WIRE LENGTH
57842	24"L x 4.25"W x 0.5"H	6"L x 6"W x 1.5"H	122"	120"
57846	48"L x 4.25"W x 0.5"H	6"L x 6"W x 1.5"H	122"	120"

### LAMPING

MODEL	BULB TYPE	LUMENS	CRI	INPUT VOLTAGE
57842	18W 3000K PCB LED (Integrated)	1260 Rated (1300 Del.)	90+	120-277V
57846	36W 3000K PCB LED (Integrated)	2520 Rated (2200 Del.)	90+	120-277V

### FINISHES OPTIONS:

- White (WT)
- Bronze (BZ)
- Matte Silver (MS)



### MATERIAL:

Aluminum  
 PMMA Acrylic Diffuser

### RATINGS:

ETL/cETL IP65  
 Damp Location  
 Dimmable with Triac Dimmer



### ADDITIONAL:

RATED LIFE: 50,000 Hours  
 OPERATING TEMP: -20° C (-4°), 40°C (104°F)  
 PHOTOMETRIC: Report Found Online

*Always consult a qualified electrician before installing any lighting product*