



Diagram A

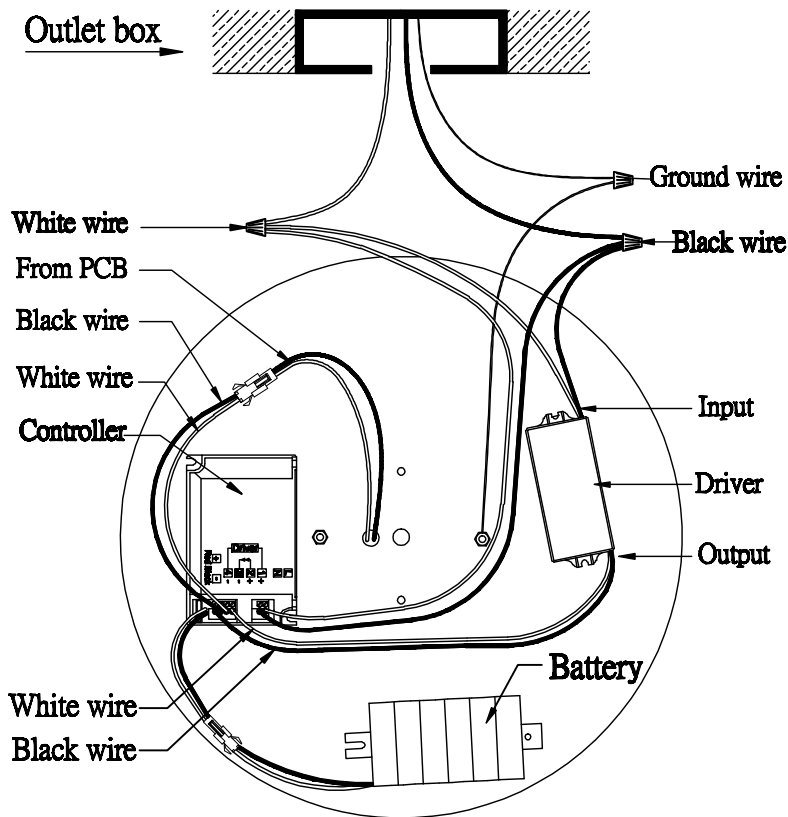

1. Disconnect the power by turning off the circuit breaker.
2. Install mounting bracket to outlet box with mounting screws provided. Make sure the 2 screws (B) are threaded in from the opposite side.
3. Wire fixture (A) wires to wires in outlet box. Black wire from Driver and black wire from controller to Black wire and White wire from Driver and white wire from controller to White wire.

Green/Bare copper wire is for Ground. Do not connect the RED and BLACK wire to the wires from outlet box, it might short circuit the Driver.

Diagram B

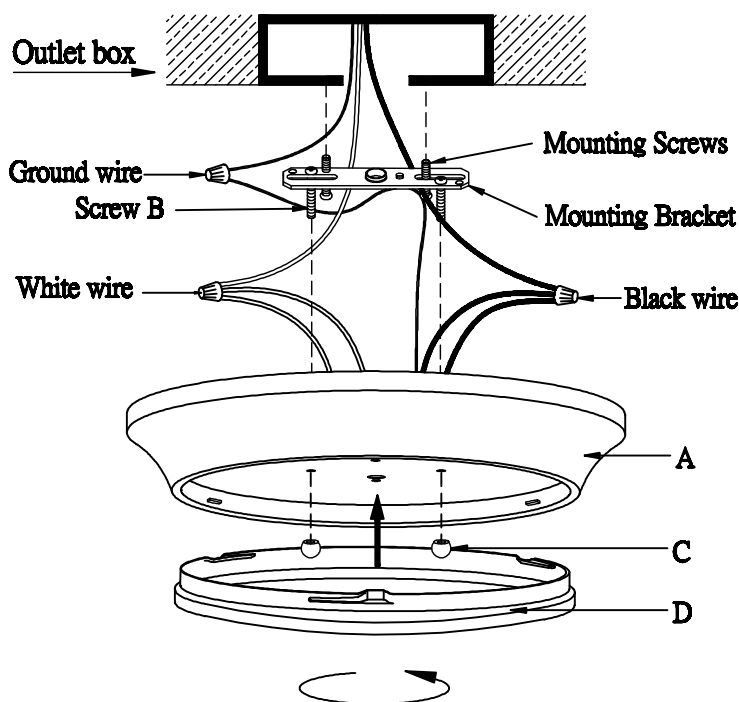

4. Install fixture (A) to mounting bracket. Aligned fixture (A) holes to screws (B) and secure with Ball Nut (C).
5. Attach Plastic Diffuser (D) to fixture (A). Turn clockwise to secure the Plastic Diffuser (D) in place.